



**Test Report**

Number: 160118014SZN-002

Applicant: : Spector & Co.  
5700 Kieran Rd, Montreal,  
QC, H4S 2B5

Date: July 11, 2016

Attn : Product Compliance

Email address : [productcompliance@spectorandco.com](mailto:productcompliance@spectorandco.com)

Vendor NO : USX007

Type of Product : WIRELESS V2.1 CARABINER SPEAKER

Brand : SPECTECH

Model No. of Product : T243

Country of Origin : China

Date of Received : Jan 18, 2016

Date of test

Conducted : Jan 19, 2016~Jan 23, 2016

Test Required : Only UL 2054 Clause 9, Clause 10 and Clause 11 per SPECTOR&CO requirement.

Sample Quantity : 4 pieces

\*\*\*\*\*

**Conclusion:**

- The submitted sample complied with TEST REQUIRED.
- The submitted sample failed to comply with TEST REQUIRED.

**Remark:**

- Package was not provided.

\*\*\*\*\*

Tested By:

Approved By:

Bernie Chen  
Project Engineer  
Intertek Testing Service SZ

Wisons Lin  
Team leader  
Intertek Testing Services SZ

- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be Pass in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST CONDUCT				
EVALUATION	CITATION	CRITERIA	Measurement / Comments	Rating
1. Short-Circuit Test	Refer UL 2054 Clause 9	<p>Each fully charged test sample battery pack, in turn, is to be short-circuited by connecting the positive and negative terminals of the battery with a circuit load having a resistance load of <math>80 \pm 20</math> m ohm. The temperature of the battery case is to be recorded during the test. The battery is to discharge until a fire or explosion is obtained, or until it is completely discharged and/or the cell case temperature has returned to <math>10^{\circ}\text{C}</math> of ambient temperature.</p> <p>Tests are to be conducted at <math>20 \pm 5^{\circ}\text{C}</math> and at <math>55 \pm 5^{\circ}\text{C}</math>; The batteries are to reach equilibrium at <math>20 \pm 5^{\circ}\text{C}</math> or <math>55 \pm 5^{\circ}\text{C}</math> as applicable, before the terminals are connected.</p> <p>For all samples tested, the samples shall not explode or catch fire and the tests shall not result in chemical leaks caused by cracking, rupturing or bursting of the cell casing. The temperature of the internal cell casings shall not exceed <math>150^{\circ}\text{C}</math> for lithium chemistries.</p>	Complied	P

TEST CONDUCT				
EVALUATION	CITATION	CRITERIA	Measurement / Comments	Rating
2. Abnormal Charging Test	Refer UL 2054 Clause10	<p>The batteries are to be tested in an ambient temperature of <math>20 \pm 5^{\circ}\text{C}</math> ,A thermocouple is to be attached to the cells of each test sample battery. Each battery shall be discharged at a constant current of 0.2C/1 hour, to a manufacturer specified discharge endpoint voltage.</p> <p>Each of the test sample batteries are to be subjected to the following overcharge conditions, in sequential order.</p> <p>a) The battery is to be initially charged using a constant current charging mode with a current limit of three times the maximum current <math>I_c</math>, specified by the manufacturer until the maximum specified charger output voltage is reached. At that point, the battery is to be charged with a constant maximum specified charger output voltage and a current limit of three times the maximum current <math>I_c</math>. Charging duration is the time required to reach the manufacturer's specified end-of-charge condition plus seven additional hours. The temperature on the cell casing shall be monitored. A re-settable protective device such as a PTC that actuates during the test shall be allowed to reset and the test shall be resumed, cycling as often as necessary, but no less than 10 times, to complete the test. Automatic reset devices are allowed to cycle during the test. When an overcurrent protective device operates during the test, the test is repeated with the same charging time, but with the battery connected to the maximum load that does not cause the protective devices to operate.</p> <p>b) The charge condition in accordance with (a) shall be conducted with each single component fault that is likely to occur in the charging circuit and which would result in overcharging of the battery.</p> <p>The samples shall not explode or catch fire. For battery pack samples, tests shall not result in chemical leaks caused by cracking, rupturing or bursting of the cell casing.</p>	Complied	P

TEST CONDUCT				
EVALUATION	CITATION	CRITERIA	Measurement / Comments	Rating
3. Abusive Overcharge Test	Refer UL 2054 Clause11	<p>The batteries are to be tested in an ambient temperature of 20 ±5°C.</p> <p>Sample batteries are to be subjected to a constant charging current at 10 times the C5 amp rate, using a supply voltage sufficient to maintain the 10 times C5 amp rate throughout the duration of the test.</p> <p>During the test, the temperature is to be measured on the internal cell casing of each sample. The test is to continue until the cell or battery explodes, vents, or a single operation protective device operates, and the temperature of the internal cell casing reaches steady state conditions or returns to ambient. If a PTC or other re-settable protection device operates during the test, it is to be reset a minimum of 10 times during the test. An automatic reset device is allowed to cycle during the test.</p> <p>During the tests, batteries supplied with protective devices shall be subjected to a single component fault using any single fault condition which is likely to occur in the charging circuit and which would result in overcharging of the battery.</p> <p>The samples shall not explode or catch fire.</p>	Complied	P

When determining the test conclusion, the Measurement Uncertainty of test has been considered.


**Results Key**

-	For information only
P	Pass
F	Fail
NA	Not applicable

**Photo**




**OVERALL**

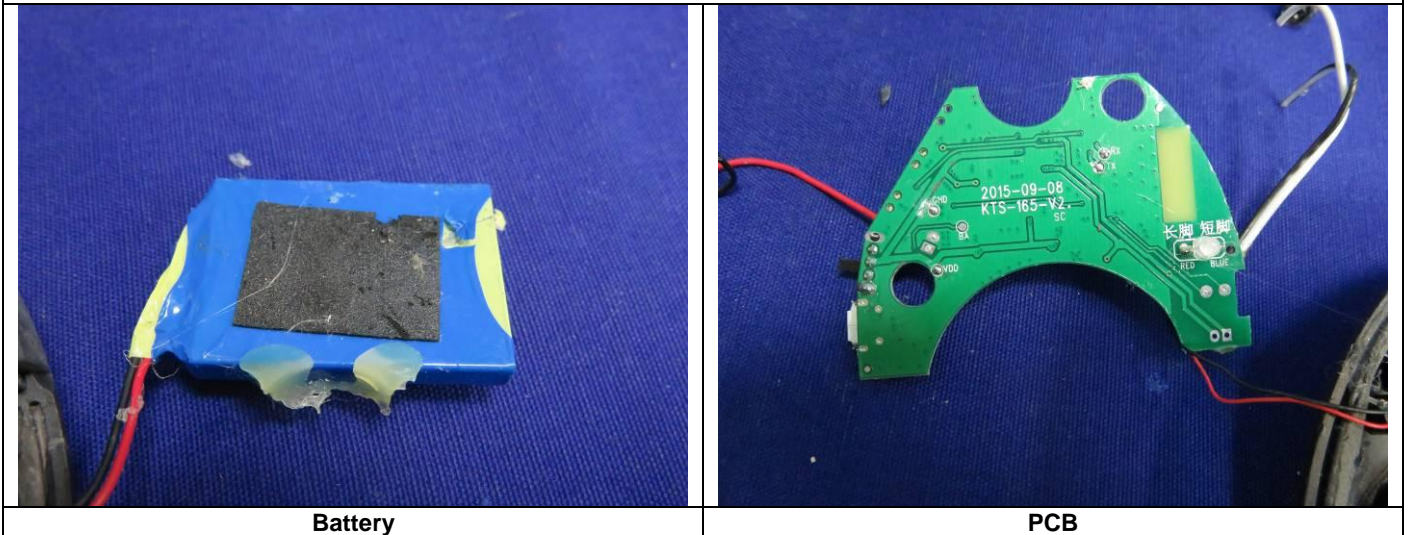

**Battery**

**PCB**




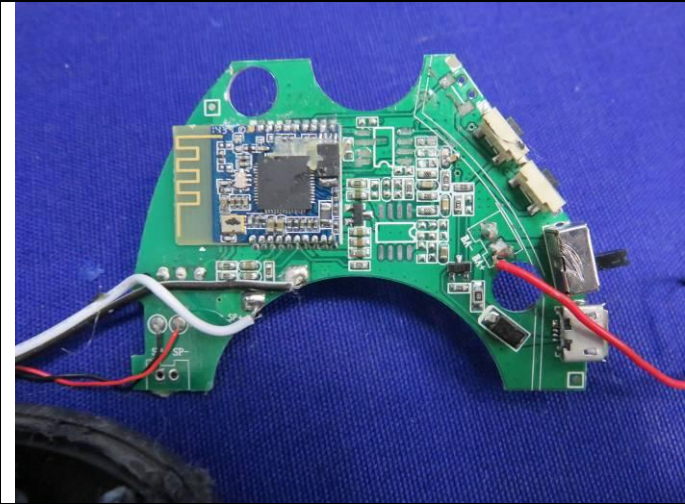

**PCB**



**SPEAKER**

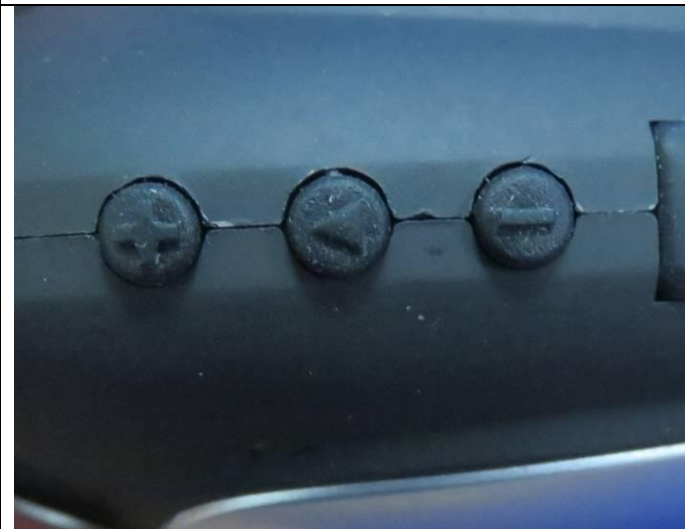

**LABELING**



**MicroUSB Port**



**LABELING**



**LABELING**



**Test Report**

Number: 160118014SZN-002

**Testing History**

Previous Report No#	Report Issued Date	Test Type	Overall Rating	Failure Reason
---	---	---	---	---