



Test Report

Number: 160118014SZN-003

Applicant: : Spector & Co.
5700 Kieran Rd, Montreal,
QC, H4S 2B5

Date: July 11, 2016

Attn : Product Compliance

Email address : productcompliance@spectorandco.com

Vendor NO : USX007

Type of Product : WIRELESS V2.1 CARABINER SPEAKER

Brand : SPECTECH

Model No. of Product : T243

Country of Origin : China

Date of Received : Jan 18, 2016

Date of test

Conducted : Jan 19, 2016~Jan 23, 2016

Test Required : Only UN 38.3 T7 per SPECTOR&CO requirement.

Sample Quantity : 4 pieces

Conclusion:

- The submitted sample complied with TEST REQUIRED.
- The submitted sample failed to comply with TEST REQUIRED.

Remark:

- Package was not provided.

Tested By:

Approved By:

Bernie Chen
Project Engineer
Intertek Testing Service SZ

Wisons Lin
Team leader
Intertek Testing Services SZ

- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be Pass in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST CONDUCT				
EVALUATION	CITATION	CRITERIA	Measurement / Comments	Rating
1. Overcharge Test	UN 38.3 T7	<p>38.3.4.7 <i>Test T.7: Overcharge</i></p> <p>38.3.4.7.1 Purpose This test evaluates the ability of a rechargeable battery to withstand an overcharge condition.</p> <p>38.3.4.7.2 Test procedure The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:</p> <p>(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.</p> <p>(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage. Tests are to be conducted at ambient temperature. The duration of the test shall be 24 hours.</p> <p>38.3.4.7.3 Requirement Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.</p>	Complied	P

When determining the test conclusion, the Measurement Uncertainty of test has been considered.


Results Key

-	For information only
P	Pass
F	Fail
NA	Not applicable

Photo



OVERALL

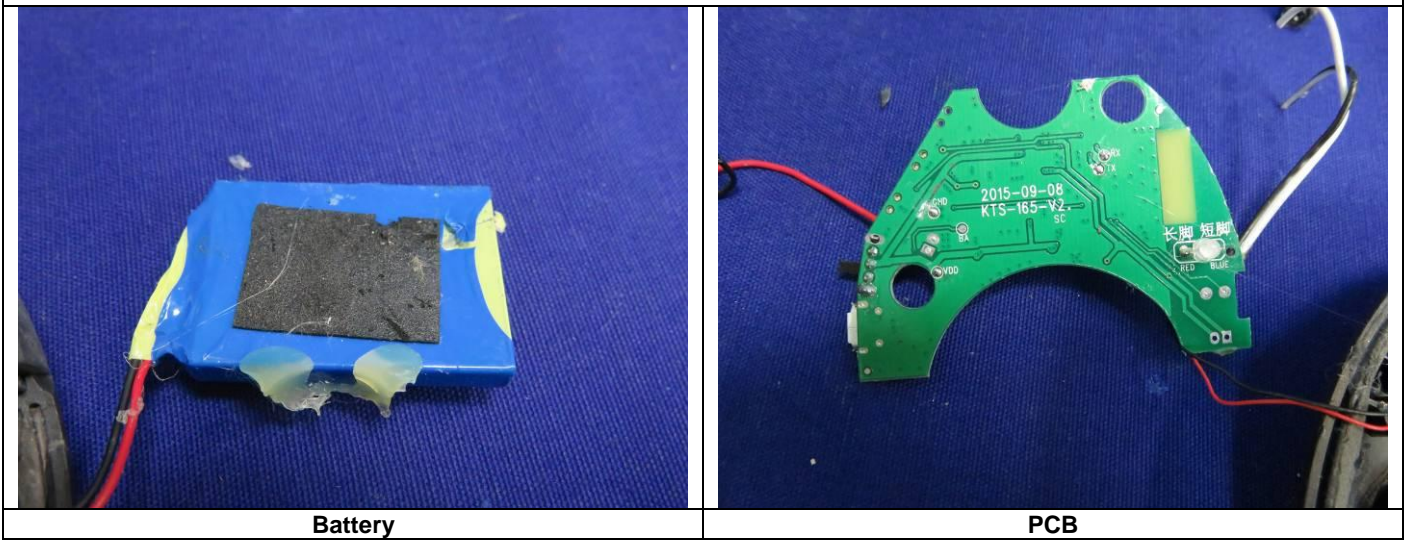

Battery


PCB



PCB



SPEAKER

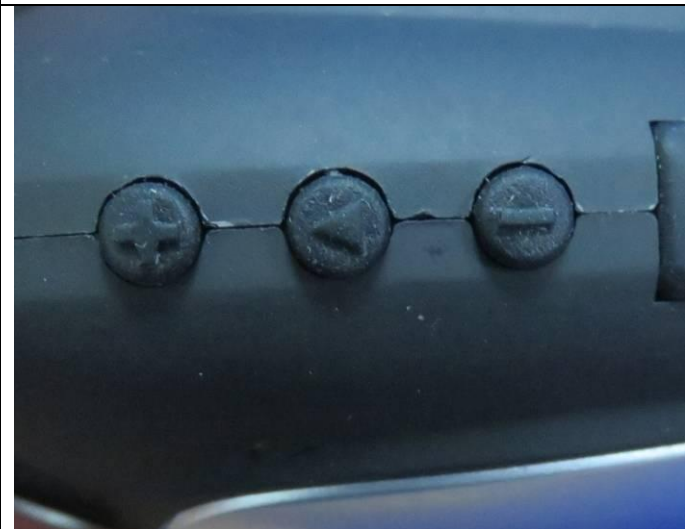

LABELING



MicroUSB Port



LABELING



LABELING



Test Report

Number: 160118014SZN-003

Testing History

Previous Report No#	Report Issued Date	Test Type	Overall Rating	Failure Reason
---	---	---	---	---